

**A multichannel fiber optic
signal conditioner
for temperature
measurement in industrial
and laboratory applications.**

Key Features

- 1, 2 or 4 channels**
- Large display**
- No gage factor or calibration**
- Range down to 25 K available**
- Voltage or current output**
- Accuracy of $\pm 0.8^{\circ}\text{C}$**

Reflex™ Signal Conditioner



The Neoptix™ Reflex™ is a multi-purpose fiber optic temperature thermometer that can have up to 4 channels. It allows the user to take multiple temperature measurements for accurate information on industrial processes. This fiber optic temperature measurement system is designed to meet laboratory requirements but is also well adapted to industrial environments.

The system is based on the proven GaAs technology. An original algorithm is used to analyze the signal and provide repeatable and reproducible measurements.

The Reflex is easy to interface to an existing system via its analog output or its RS-232 communication interface. When used with the optional Neoptix NeoLink™ software, the Neoptix Reflex becomes an indispensable laboratory instrument.

The system's immunity to electromagnetic interference and harsh environments makes it very advantageous compared to traditional sensors. Fiber optics being made of non-conductive material, they are inherently immune to EMI and RFI interference.

The Neoptix Reflex is well adapted to both laboratory and industrial environments. Its accuracy and high degree of sensitivity to temperature changes, as well as the selection of probe models available, make it a natural choice for a wide variety of applications. Moreover, the Neoptix sensors are interchangeable and no calibration or inconvenient gage factors are required when changing sensors.

The rugged, splash-proof enclosure is designed to withstand the most punishing industrial environments. For industrial needs, Reflex units can be installed together on a special 19 in. rack-mounted plate to monitor up to 16 probes simultaneously. Standard system temperature range is -80 to 300°C (-112 to 572°F). Cryogenic range available, down to 25 Kelvin.

Neoptix, Inc.
1415 Frank-Carrel, suite 220
Québec (Québec) G1N4N7 Canada
Phone : (418) 687-2500
Fax : (418) 687-2524
info@neoptix.com

www.neoptix.com



DISTRIBUTED BY
Safibra, s.r.o. | www.safibra.cz

Technical Specifications



Model:	Reflex™
Number of channels:	1,2 or 4
Resolution:	0.1°C (0.2°F)
Precision:	±0.8°C or 1 % FS
Accuracy (calibrated):	±0.3°C on all probes at ±20° of temperature ref. point
Response time:	10 Hz on single-channel version, 250 milliseconds switching with multiple channels
Operating temperature:	0 to 50°C (32 to 122°F)
Storage temperature:	-20 to 60°C (-4 to 140°F)
Display:	2 lines X 16 characters Vacuum Fluorescent Display
Communication port:	RS-232 ; USB or Ethernet to serial optional
Operating Mode:	Front panel, Neoptix™ NeoLink™ PC Software or RS-232 ASCII commands
Analog outputs:	Standard: 0-10 Volts, Optional: 4-20 mA
Temperature range:	-80 to 300°C (-112 to 572°F) Cryogenic range available (down to 25 Kelvin)
Probe compatibility:	All Neoptix temperature probes
Power:	18 to 24 VDC, 8 W
Dimensions:	Width: 141.4 mm (5.57 in.); Height: 64.0 mm (2.52 in.) Length: 227.3 mm (8.95 in.)
Weight:	1.2 Kg

Ordering Codes:

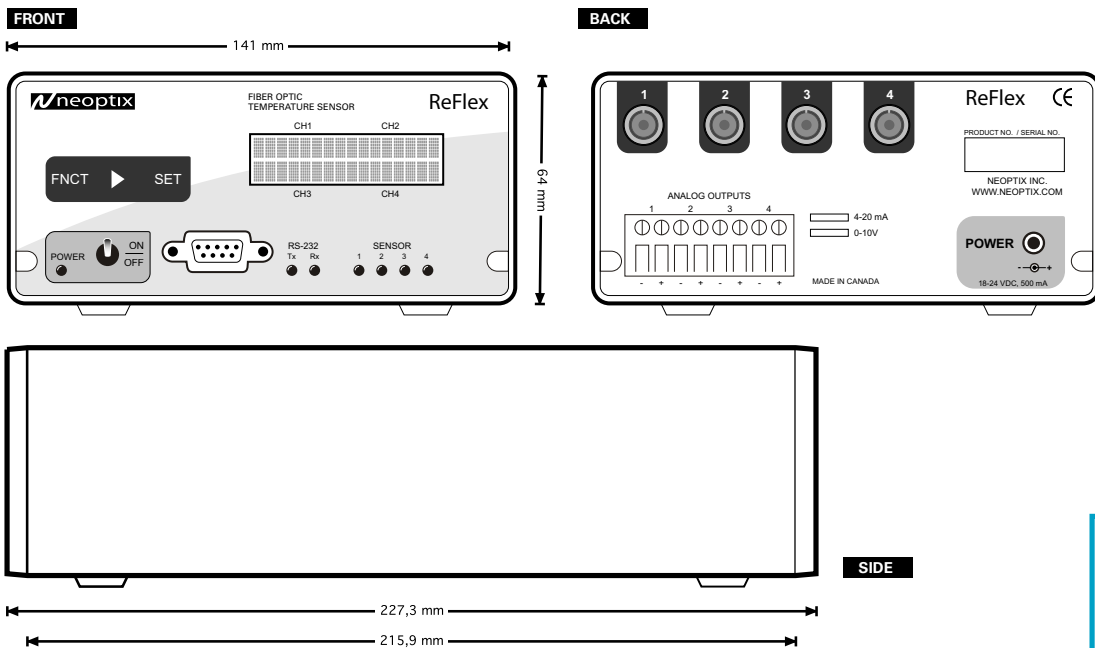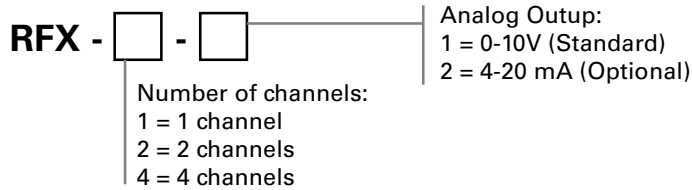

Neoptix, Inc.
 1415 Frank-Carrel, suite 220
 Québec (Québec) G1N 4N7 Canada
 Phone : (418) 687-2500
 Fax : (418) 687-2524
 info@neoptix.com

www.neoptix.com

DISTRIBUTED BY
 Safibra, s.r.o.
 Cernokostelecka 1621
 CZ-25101 Ricany, Czech Republic
 Phone: +420 323 601 615
 safibra@safibra.cz